
Item Code: 100-075



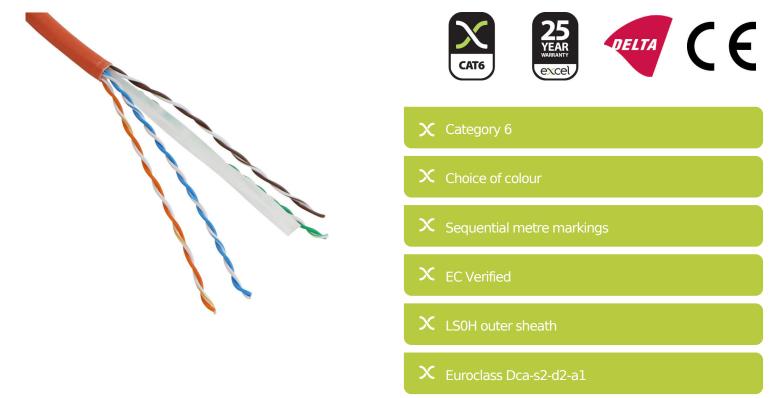

#### **Product Overview**

Excel Category 6 Unscreened LSOH cables are manufactured and tested to the TIA/EIA 568-B.2-1, EN50173-1 and ISO/ IEC 11801 Category 6 specifications. Each cable consists of 8 colour coded polyethylene insulated conductors. These are twisted together to form 4 pairs with varying lay lengths. These pairs are then formed around a central X-shaped polyethylene filler, which assists in maintaining and enhancing the cable performance.

The print legend on the cable now includes information regarding the DOP number, Test and Classification of the cable for traceability.

#### **Product Specifications**

Feature	Values
Category	6
Overall screening	None
Conductor screening	None
Outer sheath colour	Orange
Reaction-to-fire class according to EN 13501-6	Dca
Smoke development class according to EN 13501-6	s2
Euro class flaming droplets/particles according to EN 13501-6	d2
Euro class acidity according to EN 13501-6	al
AWG-size	23

Item Code: 100-075



Specification core insulation	PE
Core identification	Colour
Outer sheath material	Copolymer
Halogen free (acc. EN 60754-1/2)	Yes
Flame retardant	In accordance with EN 60332-1-2 and EN 50399
Low smoke (acc. BS EN 61034-2)	Yes
Outer diameter approx.	6.2 mm
Installation Temperature Range	060 °C
Operating Temperature Range	-2075 °C
NVP value	69 %
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Conductor surface	Bare


### **Cable specifications**

Features	Values
Dielectric strength	2.5kV for 2s
Maximum Pulling Load	60N/6.1KgF
MBR during installation	8x cable OD
MBR installed	4x cable OD

Item Code: 100-075



### **Cross-section diagram**



#### **Standards**

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part ${\bf 1}$ General Requirements
IEC 61156-5:2009+AMD1:2012 CSV	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2011	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
BS EN 50288-6-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2011	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH

Item Code: 100-075



	measurement) and conductivity
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under defined conditions – Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
RoHS	Restriction of Hazardous Substances - Compliant

### **Part Number Table**

Part Number	Description
100-071	Excel Category 6 Cable U/UTP Dca LS0H 305m Box - Violet
100-071-1000M	Excel Category 6 Cable U/UTP Dca LS0H 1000m Reel - Violet
100-071-500M	Excel Category 6 Cable U/UTP Dca LS0H 500m Reel - Violet
100-072	Excel Category 6 Cable U/UTP Dca LS0H 305m Box - Green
100-074	Excel Category 6 Cable U/UTP Dca LS0H 305m Box - White
100-074-1000M	Excel Category 6 Cable U/UTP Dca LS0H 1000m Reel - White
100-074-500M	Excel Category 6 Cable U/UTP Dca LS0H White 500m Reel - White
100-075	Excel Category 6 Cable U/UTP Dca LS0H 305m Box - Orange
100-103	Excel Category 6 Dual Cable U/UTP LS0H 500m Reel - White

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

